

# Витрины для торговли CVE, CVES, CMCVE, CV, CVER, CVP, CVEA, CVEE

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70





Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [ccf@nt-rt.ru](mailto:ccf@nt-rt.ru) || сайт: <https://coreco.nt-rt.ru/>



## EVAPORADOR ESTÁTICO - STATIC EVAPORATOR

|            |
|------------|
| CVE-9-10-R |
| CVE-9-13-R |
| CVE-9-15-R |
| CVE-9-20-R |
| CVE-9-25-R |
| CVE-9-30-R |

|             |
|-------------|
| CVE-9-10-RR |
| CVE-9-13-RR |
| CVE-9-15-RR |
| CVE-9-20-RR |
| CVE-9-25-RR |
| CVE-9-30-RR |

|            |
|------------|
| CVE-9-10-C |
| CVE-9-13-C |
| CVE-9-15-C |
| CVE-9-20-C |
| CVE-9-25-C |
| CVE-9-30-C |

|             |
|-------------|
| CVE-9-10-CC |
| CVE-9-13-CC |
| CVE-9-15-CC |
| CVE-9-20-CC |
| CVE-9-25-CC |
| CVE-9-30-CC |

## EVAPORADOR VENTILADO - VENTILATED EVAPORATOR

|               |
|---------------|
| CVE-9-10-R-TF |
| CVE-9-13-R-TF |
| CVE-9-15-R-TF |
| CVE-9-20-R-TF |
| CVE-9-25-R-TF |
| CVE-9-30-R-TF |

|                |
|----------------|
| CVE-9-10-RR-TF |
| VE-9-13-RR-TF  |
| VE-9-15-RR-TF  |
| VE-9-20-RR-TF  |
| VE-9-25-RR-TF  |
| VE-9-30-RR-TF  |

|               |
|---------------|
| CVE-9-10-C-TF |
| VE-9-13-C-TF  |
| VE-9-15-C-TF  |
| VE-9-20-C-TF  |
| VE-9-25-C-TF  |
| VE-9-30-C-TF  |

|                |
|----------------|
| CVE-9-10-CC-TF |
| VE-9-13-CC-TF  |
| VE-9-15-CC-TF  |
| VE-9-20-CC-TF  |
| VE-9-25-CC-TF  |
| VE-9-30-CC-TF  |

| mod.     | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m²) | reserva<br>cold storage<br>(m³) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|----------|-------------------------|-----------------------------------|---------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE-9-10 | 1055                    | 0,65                              | 0,33                            | 1                         | 522                                  | 404                           | R449A                       |
| CVE-9-13 | 1305                    | 0,82                              | 0,43                            | 2                         | 635                                  | 1009                          | R449A                       |
| CVE-9-15 | 1525                    | 0,97                              | 0,49                            | 2                         | 817                                  | 1079                          | R449A                       |
| CVE-9-20 | 2025                    | 1,31                              | 0,67                            | 3                         | 817                                  | 1103                          | R449A                       |
| CVE-9-25 | 2525                    | 1,65                              | 0,84                            | 4                         | 1096                                 | 1365                          | R449A                       |
| CVE-9-30 | 2995                    | 1,96                              | 1,19                            | 4                         | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera -
- **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior y estante
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP -
- **Evaporador estático o ventilado**, con tratamiento EPOXY anti-corrosión
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper - Tempered and hinged front glass
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **Static or ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>frontal<br>decor | decoración<br>total<br>decor | lacado<br>alto brillo<br>High glossy<br>lacquered | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|--------------------------------|------------------------------|---------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-13               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-15               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-20               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-25               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-30               |                                |                              |                                                   |                             |                               |                               |                                    |                   |           |

# Vitrina expositora modular serie 9 con reserva

## Serve over counter modular line 9 with cold storage area

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
Consult



DE SERIE  
STANDAR



CVE-9-20-C  
decoración estándar  
standard decor




decoración frontal  
front decor

CVE-9-20-R




lacado total  
total lacquered

CVE-9-20-RR



opcional

interior 440x270

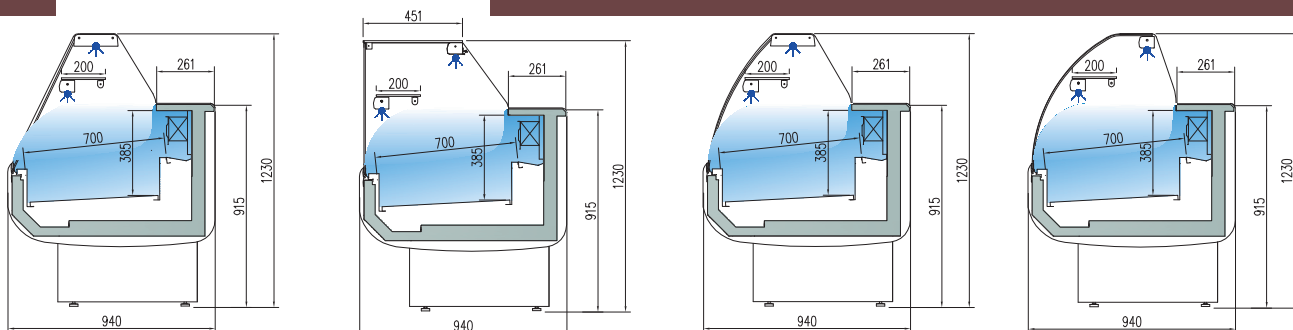

## EVAPORADOR ESTÁTICO - STATIC EVAPORATOR

|             |
|-------------|
| CVES-9-10-R |
| CVES-9-13-R |
| CVES-9-15-R |
| CVES-9-20-R |
| CVES-9-25-R |
| CVES-9-30-R |

|              |
|--------------|
| CVES-9-10-RR |
| CVES-9-13-RR |
| CVES-9-15-RR |
| CVES-9-20-RR |
| CVES-9-25-RR |
| CVES-9-30-RR |

|             |
|-------------|
| CVES-9-10-C |
| CVES-9-13-C |
| CVES-9-15-C |
| CVES-9-20-C |
| CVES-9-25-C |
| CVES-9-30-C |

|              |
|--------------|
| CVES-9-10-CC |
| CVES-9-13-CC |
| CVES-9-15-CC |
| CVES-9-20-CC |
| CVES-9-25-CC |
| CVES-9-30-CC |

## EVAPORADOR VENTILADO - VENTILATED EVAPORATOR

|                |
|----------------|
| CVES-9-10-R-TF |
| CVES-9-13-R-TF |
| CVES-9-15-R-TF |
| CVES-9-20-R-TF |
| CVES-9-25-R-TF |
| CVES-9-30-R-TF |

|                 |
|-----------------|
| CVES-9-10-RR-TF |
| CVES-9-13-RR-TF |
| CVES-9-15-RR-TF |
| CVES-9-20-RR-TF |
| CVES-9-25-RR-TF |
| CVES-9-30-RR-TF |

|                |
|----------------|
| CVES-9-10-C-TF |
| CVES-9-13-C-TF |
| CVES-9-15-C-TF |
| CVES-9-20-C-TF |
| CVES-9-25-C-TF |
| CVES-9-30-C-TF |

|                 |
|-----------------|
| CVES-9-10-CC-TF |
| CVES-9-13-CC-TF |
| CVES-9-15-CC-TF |
| CVES-9-20-CC-TF |
| CVES-9-25-CC-TF |
| CVES-9-30-CC-TF |

| mod.      | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|-----------|-------------------------|------------------------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVES-9-10 | 1055                    | 0,65                                           | 522                                  | 404                           | R449A                       |
| CVES-9-13 | 1305                    | 0,82                                           | 635                                  | 1009                          | R449A                       |
| CVES-9-15 | 1525                    | 0,97                                           | 817                                  | 1079                          | R449A                       |
| CVES-9-20 | 2025                    | 1,31                                           | 817                                  | 1103                          | R449A                       |
| CVES-9-25 | 2525                    | 1,65                                           | 1096                                 | 1365                          | R449A                       |
| CVES-9-30 | 2995                    | 1,96                                           | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior y estante
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- **Evaporador estático o ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged front glass
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- **Static or ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>front<br>decor | decoración<br>total<br>decor | lacado<br>alto brillo<br>High glossy<br>lacquered | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|------------------------------|------------------------------|---------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-13               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-15               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-20               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-25               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |
| CV-30               |                              |                              |                                                   |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y válvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult


# Vitrina expositora modular serie 9 sin reserva Serve over counter modular line 9 without cold storage area

7


gráficas no contractuales



Consultar  
Consult



DE SERIE  
STANDAR

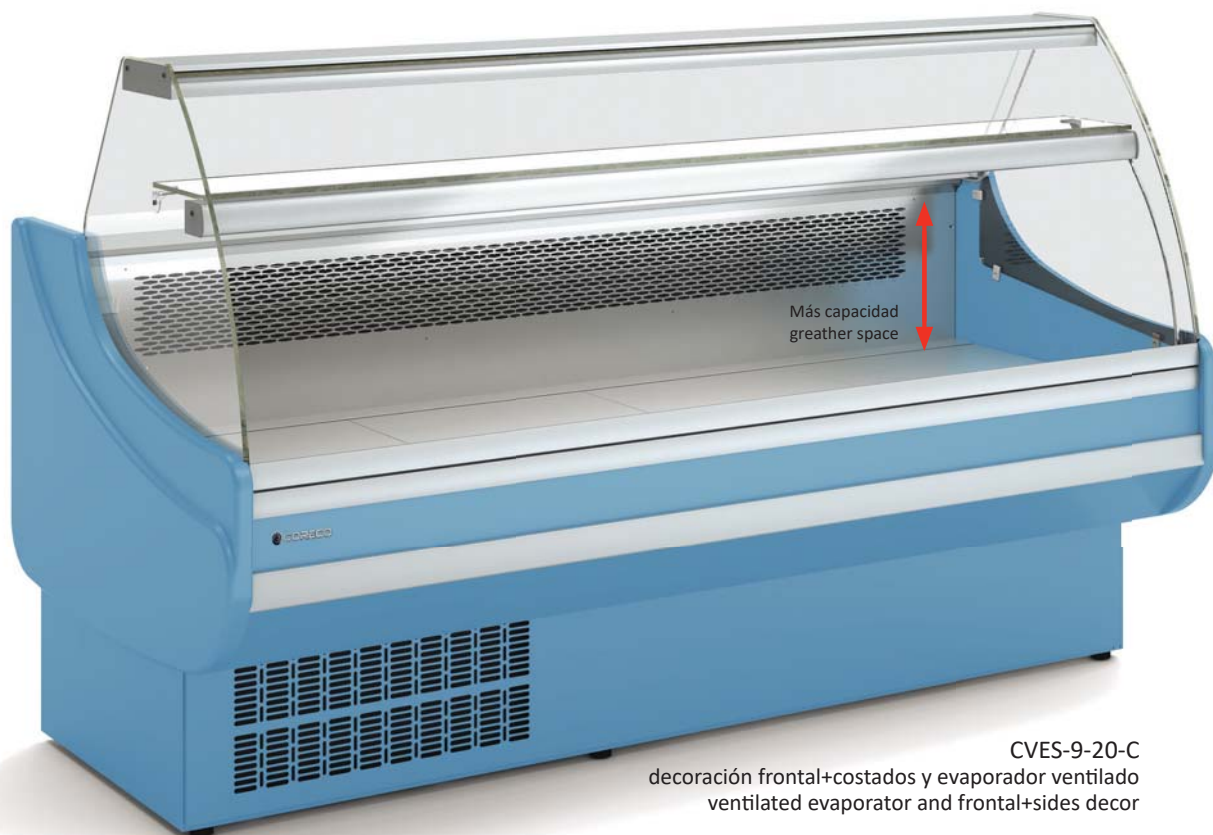

CVES-9-20-C  
decoración frontal+costados y evaporador ventilado  
ventilated evaporator and frontal+sides decor



decoración frontal  
front decor

CVES-9-20-R



lacado  
lacquered


CVES-9-20-RR



opcional



CVE-9-AN90-C  
CVE-9-AN90-R  
CVE-9-AN90-RR  
CVES-9-AN90-C  
CVES-9-AN90-R  
CVES-9-AN90-RR



CVE-9-AP90-C  
CVE-9-AP90-R  
CVE-9-AP90-RR  
CVES-9-AP90-C  
CVES-9-AP90-R  
CVES-9-AP90-RR




CVE-9-RP90-C  
CVE-9-RP90-RR  
CVES-9-RP90-C  
CVES-9-RP90-RR



CVE-9-RN90-C  
CVE-9-RN90-RR  
CVES-9-RN90-C  
CVES-9-RN90-RR

| mod.             | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | exposición<br>display<br>RSA (m²) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|------------------|-------------------------|------------------------|------------------------|-----------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE/CVES-9-AN90  | 1500                    | 1230                   | 1500                   | 0,98                              | 687                                  | 1125                          | R449A                       |
| CVE/CVES-9-AP90  | 1325                    | 1230                   | 1325                   | 1,04                              | 687                                  | 1125                          | R449A                       |
| CVE/CVES-9-RN90  | 1352                    | 1230                   | 1352                   | 1,01                              | 687                                  | 1125                          | R449A                       |
| CVE/CVES-9-RP90  | 1335                    | 1230                   | 1335                   | 1,32                              | 687                                  | 1125                          | R449A                       |
| CVE/CVES-9N-AN45 | 1090                    | 1230                   | 1060                   | 0,48                              | -                                    | -                             | -                           |
| CVE/CVES-9N-AP45 | 1040                    | 1230                   | 940                    | 0,53                              | -                                    | -                             | -                           |
| CMCVE-9-8        | 800                     | 910                    | 940                    |                                   |                                      |                               |                             |
| CMCVE-9-12       | 1200                    | 910                    | 940                    |                                   |                                      |                               |                             |
| CMCVE-9-AP90     | 1670                    | 910                    | 690                    |                                   |                                      |                               |                             |
| CMCVE-9-AN90     | 1638                    | 910                    | 825                    |                                   |                                      |                               |                             |

| OPCIONES<br>OPTIONS | <br>decoracion frontal<br>front decor | <br>decoracion total<br>total decor | <br>trc... alto brillo<br>glossy frontal | <br>total alto brillo<br>total glossy | puerta<br>plexi<br>plexi<br>door | cierre<br>cortina<br>night<br>blind | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-instala-<br>cion<br>remote unit |
|---------------------|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------------|------------------------------------|-------------------|-------------------------------------|
| CVE/CVES-9-AN90     |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CVE/CVES-9-AP90     |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CVE/CVES-9-RN90     |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CVE/CVES-9-RP90     |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CVE/CVES-9N-AN45    |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CVE/CVES-9N-AP45    |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CMCVE-9-8           |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CMCVE-9-12          |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CMCVE-9-AP90        |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |
| CMCVE-9-AN90        |                                                                                                                          |                                                                                                                        |                                                                                                                             |                                                                                                                          |                                  |                                     |                                    |                   |                                     |

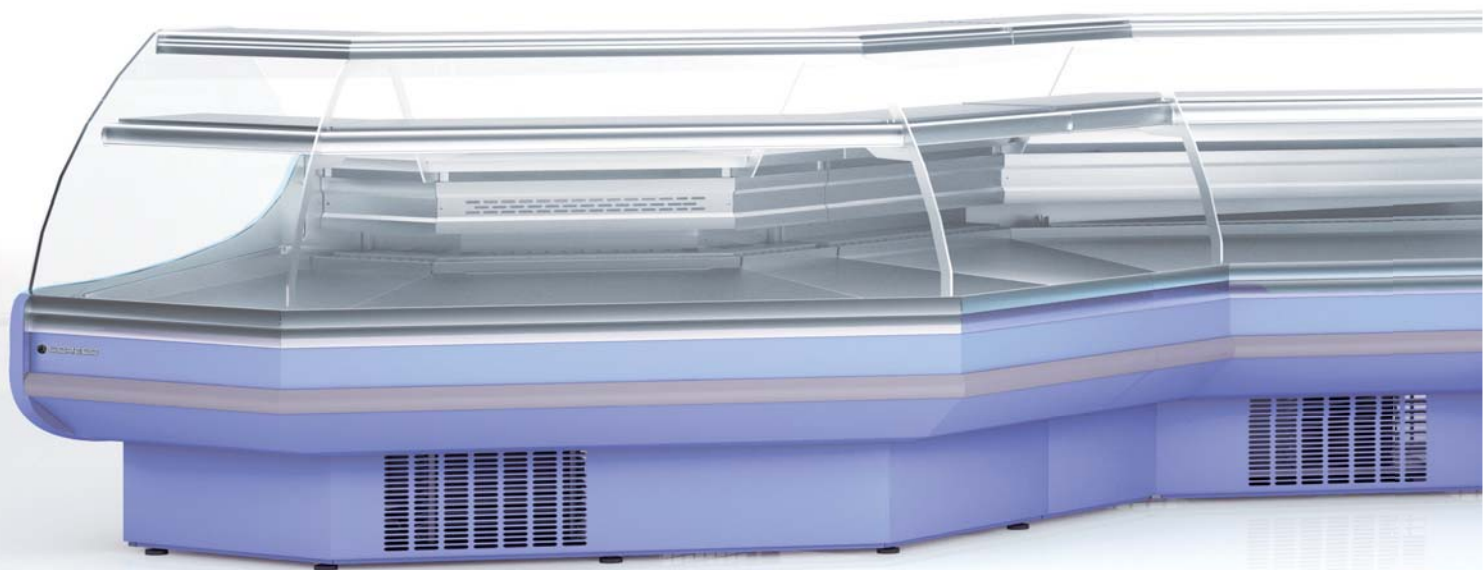

# Vitrina expositora modular serie-9, con y sin reserva Serve over counters modular line-9, with and without cold storage

7



CVES-9N-AP45-C  
CVES-9N-AP45-R  
CVES-9N-AP45-RR



CVES-9N-AN45-C  
CVES-9N-AN45-R  
CVES-9N-AN45-RR



CMCVE-9-8  
CMCVE-9-12



CMCVE-9-AP90  
CMCVE-9-AN90



Consultar  
Consult

características técnicas y constructivas sujetas a variación sin previo aviso



Altura adaptada  
adapted height

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal templado
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP

## AP90 / AN90 / RP90 / RN90

- Angulos refrigerados **sin reserva frigorifica**
- Compatibles con módulos CVE-9 y CVES-9
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Evaporación automática de serie
- Clase climática 4 ( 30°C 55%) régimen M1 (-1/+5°C)

## AP45 / AN45

- Angulos neutros
- Compatibles con módulos CVE y CVES

## CMCVE

- Mueble caja con cajón, estante y enchufe (excepto en ángulos)
- Todas las decoraciones al mismo precio

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- Anodised aluminium profiles
- Front rubber bumper
- Tempered glass
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP

## AP90 / AN90 / RP90 / RN90

- Refrigerated angles, without cooling storage area
- Compatibles with CVE-9 and CVES-9 modules
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Standard automatic evaporation
- Climate class 4 ( 30°C 55%) regime M1 (-1/+5°C)

## AP45 / AN45



- Neutral angles
- Compatibles with CVE and CVES modules


## CMCVE

- Cash counters with shelve, drawer and plug (except angles)
- All decorations included in price


Cristales  
disponibles

Available  
glasses

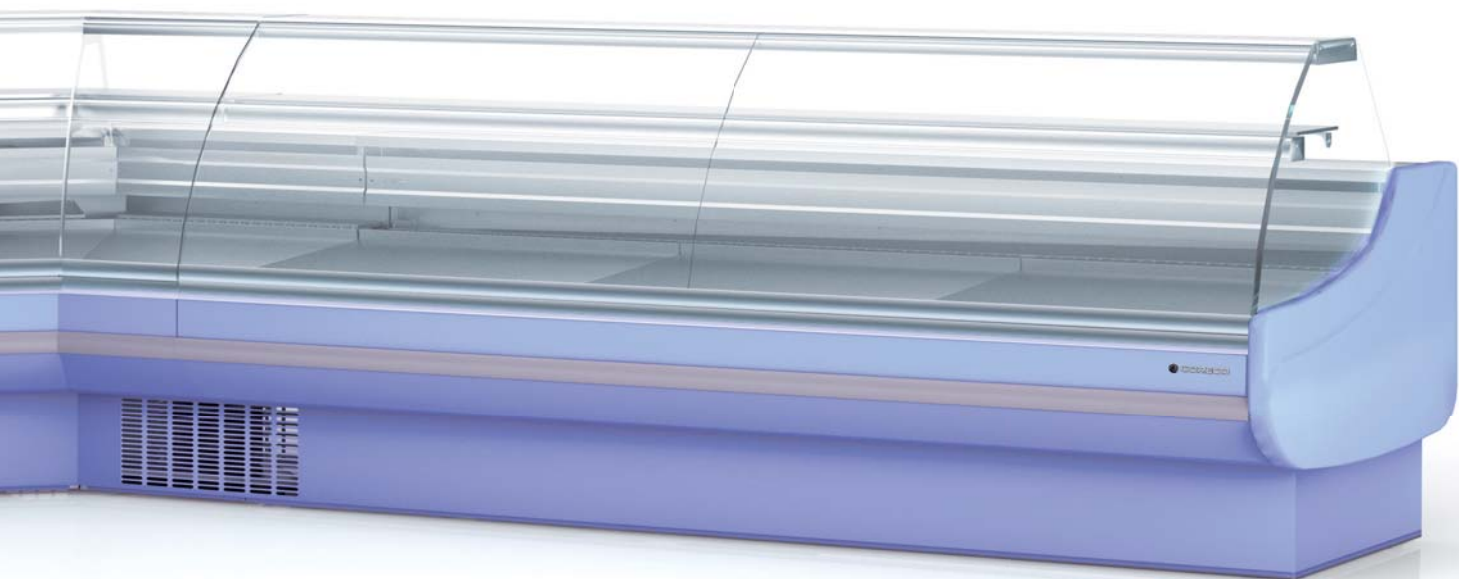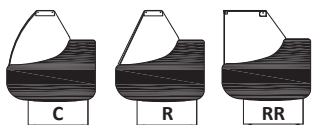


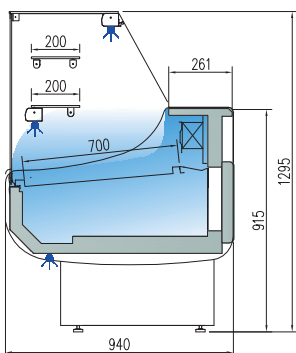

CVEP-9-10-RR  
CVEP-9-13-RR  
CVEP-9-15-RR  
CVEP-9-20-RR  
CVEP-9-25-RR  
CVEP-9-30-RR

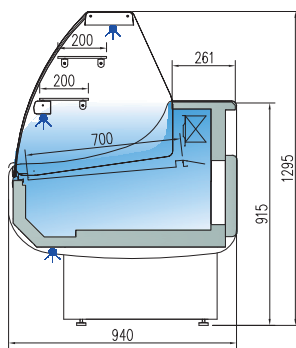

CVEP-9-10-C  
CVEP-9-13-C  
CVEP-9-15-C  
CVEP-9-20-C  
CVEP-9-25-C  
CVEP-9-30-C

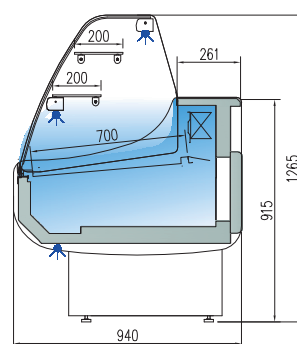

CVEP-9-10-CC  
CVEP-9-13-CC  
CVEP-9-15-CC  
CVEP-9-20-CC  
CVEP-9-25-CC  
CVEP-9-30-CC

| mod.      | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | cámara<br>storage<br>(m <sup>3</sup> ) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|-----------|-------------------------|------------------------------------------------|----------------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVEP-9-10 | 1055                    | 0,65                                           | 0,33                                   | 1                         | 522                                  | 404                           | R449A                       |
| CVEP-9-13 | 1305                    | 0,82                                           | 0,43                                   | 2                         | 635                                  | 1009                          | R449A                       |
| CVEP-9-15 | 1525                    | 0,97                                           | 0,49                                   | 2                         | 817                                  | 1079                          | R449A                       |
| CVEP-9-20 | 2025                    | 1,31                                           | 0,67                                   | 3                         | 817                                  | 1103                          | R449A                       |
| CVEP-9-25 | 2525                    | 1,65                                           | 0,84                                   | 4                         | 1096                                 | 1365                          | R449A                       |
| CVEP-9-30 | 2995                    | 1,96                                           | 1,19                                   | 4                         | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Diseño especial para pastelería, con dos estantes en el plano de exposición y dos puntos de iluminación LED 6500 K estándar
  - Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estantes de cristal intermedios, no refrigerados
  - Iluminación LED 6500 K estándar: encimera superior, estante inferior y base frontal
  - Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
  - **Evaporador estático, opcional ventilado**, con tratamiento EPOXY anticorrosión de serie
  - Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Clase climática 4 ( 30°C 55%) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Design focused for bakery, with two shelves at the exposure and two standard lighting
  - Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area
  - 40 mm sides in injected ABS, except wood decor
  - **Standard decoration:** short dark gray sides gray front+ blue decorative stripe. Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged front glass
  - Glass shelves non refrigerated
  - Standard LED 6500 K lighting: top worktop, shelf and front base
  - Optional 3000 K LED (soft light) or Fresh red, same price
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Refrigerated under storage with doors 440x270 (except for ambient models)
  - **Static evaporator, ventilated on demand**, with anticorrosion EPOXY treated as standard
  - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
  - Electronic temperature controller
  - External thermometer
  - Auto defrost, by heated cable as optional
  - Climate class 4 ( 30°C 55%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>fontal<br>front<br>decor | decoración<br>total<br>total<br>decor | lacado<br>alto brillo<br>Hight glossy<br>lacquered | evaporador<br>ventilado<br>ventilated<br>evaporator | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|----------------------------------------|---------------------------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-13               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-15               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-20               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-25               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-30               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 PASTELERÍA con reserva  
*Serve over counter modular line 9 PASTRY with cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
 Consult



DE SERIE  
 STANDAR



CVEP-9-20-C  
 lacado  
 lacquered



CVEP-9-20-CC  
 madera  
 wood



decoración frontal  
 front decor



versión RR




opcional

interior 440x270



CVEP-9-AP90-C  
CVEP-9-AP90-RR



CVEP-9-AN90-C  
CVEP-9-AN90-RR




CVEP-9-RP90-C  
CVEP-9-RP90-RR




CVEP-9-RN90-C  
CVEP-9-RN90-RR

| mod.         | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|--------------|-------------------------|------------------------|------------------------|------------------------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVEP-9-AN90  | 1500                    | 1300                   | 1500                   | 0,98                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9-AP90  | 1325                    | 1300                   | 1325                   | 1,04                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9N-AN45 | 1090                    | 1300                   | 1060                   | 0,48                                           | -                                    | -                             | -                           |
| CVEP-9N-AP45 | 1040                    | 1300                   | 940                    | 0,53                                           | -                                    | -                             | -                           |
| CVEP-9-RN90  | 1352                    | 1300                   | 1352                   | 1,01                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9-RP90  | 1335                    | 1300                   | 1335                   | 1,32                                           | 687                                  | 1125                          | R449A                       |
| CMCVE-9-8    | 800                     | 910                    | 940                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-12   | 1200                    | 910                    | 940                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-AP90 | 1670                    | 910                    | 690                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-AN90 | 1638                    | 910                    | 825                    | -                                              | -                                    | -                             | -                           |

## OPCIONES OPTIONS




decoración frontal  
front decor



decoración total  
total decor



frente alto brillo  
glossy frontal



total alto brillo  
total glossy

puerta  
plexi

plexi  
door

cierre  
cortina

night  
blind

luz extra  
LED

extra lighting


neutra

neutral

pre-instalación

remote unit

|              |
|--------------|
| CVEP-9-AN90  |
| CVEP-9-AP90  |
| CVEP-9-RN90  |
| CVEP-9-RP90  |
| CVEP-9N-AN45 |
| CVEP-9N-AP45 |
| CMCVE-9-8    |
| CMCVE-9-12   |
| CMCVE-9-AP90 |
| CMCVE-9-AN90 |

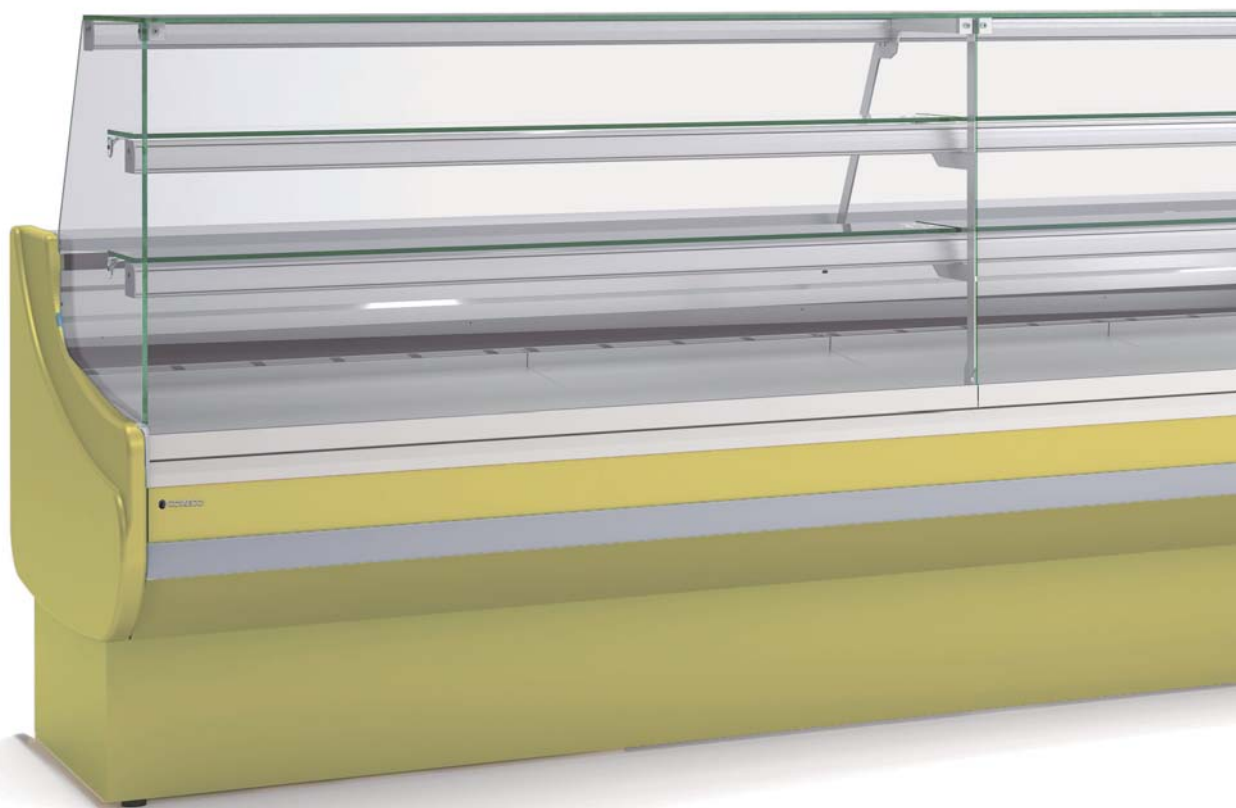

# Vitrina expositora modular serie-9 PASTELERA, con reserva Serve over counters modular line-9 PASTRY, with and without cold storage

7

all photos must be considered as a reference - fotografías no contractuales



|                 |         |
|-----------------|---------|
| CVEP-9N-AP45-C  | 3.368 € |
| CVEP-9N-AP45-RR | 3.368 € |


|                 |         |
|-----------------|---------|
| CVEP-9N-AN45-C  | 3.399 € |
| CVEP-9N-AN45-RR | 3.399 € |

|            |         |
|------------|---------|
| CMCVE-9-8  | 964 €   |
| CMCVE-9-12 | 1.060 € |

|              |         |
|--------------|---------|
| CMCVE-9-AP90 | 1.751 € |
| CMCVE-9-AN90 | 1.751 € |

Cristales disponibles

Available glasses

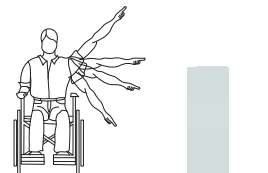

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal templado
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- Anodised aluminium profiles
- Front rubber bumper
- Tempered glass
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP

## AP90 / AN90 / RP90 / RN90

- Angulos refrigerados **sin reserva frigorífica**
- Compatibles con módulos CVEP-9
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Evaporación automática de serie
- Clase climática 4 ( 30°C 55%) régimen M1 (-1/+5°C)

## AP45 / AN45

- Angulos neutros
- Compatibles con módulos CVEP

## CMCVE

- Mueble caja con cajón, estante y enchufe (excepto en ángulos)
- Todas las decoraciones al mismo precio

## AP90 / AN90 / RP90 / RN90


- Refrigerated angles, without cooling storage area
- Compatibles with CVEP-9 modules
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Standard automatic evaporation
- Climate class 4 ( 30°C 55%) regime M1 (-1/+5°C)


## AP45 / AN45

- Neutral angles
- Compatibles with CVEP modules


## CMCVE

- Cash counters with shelf, drawer and plug (except angles)
- All decorations included in price

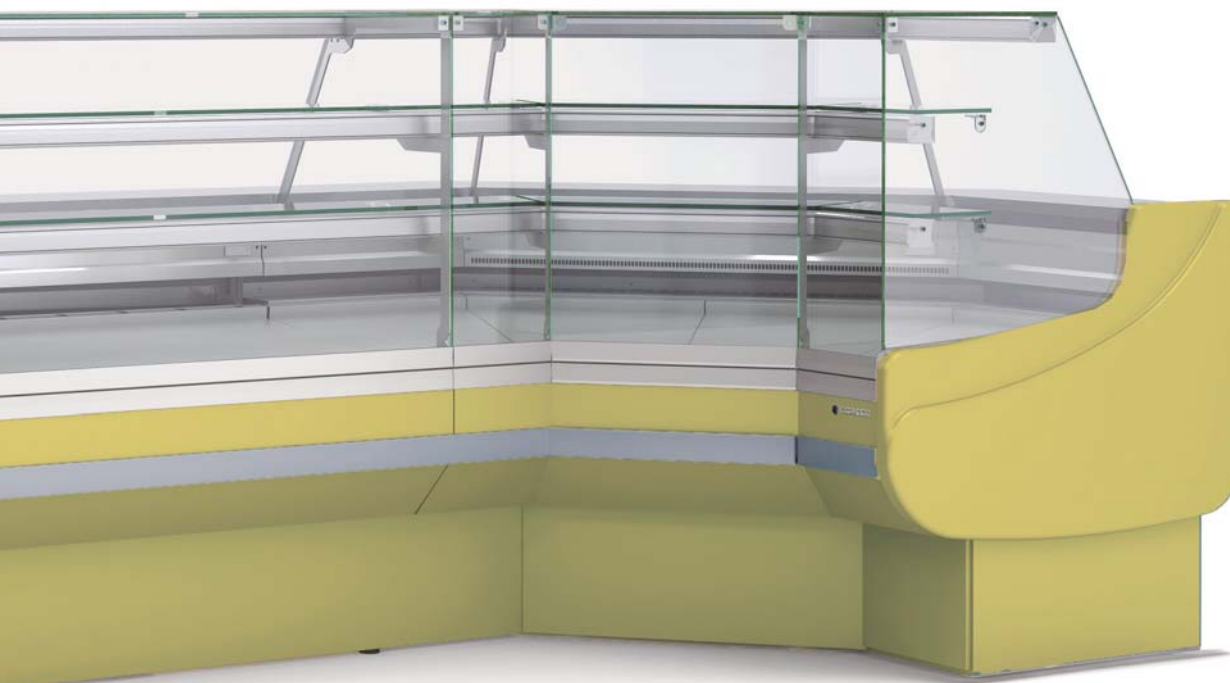


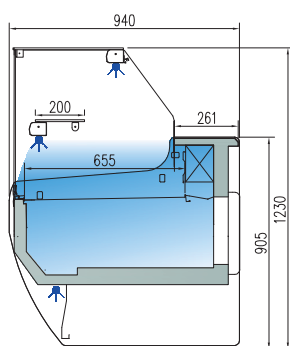

CV-9-10-RR  
CV-9-13-RR  
CV-9-15-RR  
CV-9-20-RR  
CV-9-25-RR  
CV-9-30-RR

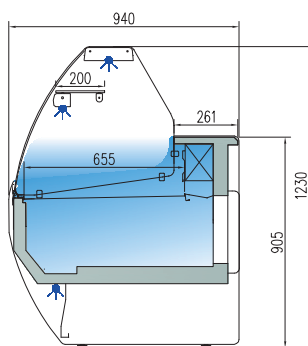

CV-9-10-C  
CV-9-13-C  
CV-9-15-C  
CV-9-20-C  
CV-9-25-C  
CV-9-30-C

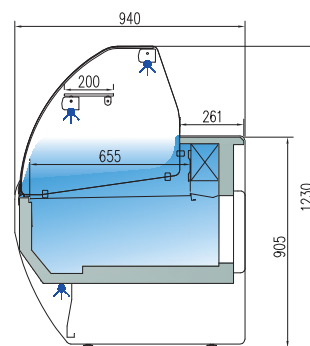

CV-9-10-CC  
CV-9-13-CC  
CV-9-15-CC  
CV-9-20-CC  
CV-9-25-CC  
CV-9-30-CC

| mod.    | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | reserva<br>cold storage<br>(m <sup>3</sup> ) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | potencia frig.<br>frig. power<br>(W) | refrigerante<br>refrigerant |
|---------|-------------------------|------------------------------------------------|----------------------------------------------|---------------------------|--------------------------------------|--------------------------------------|-----------------------------|
| CV-9-10 | 1055                    | 0,65                                           | 0,33                                         | 1                         | 522                                  | 404                                  | R449A                       |
| CV-9-13 | 1305                    | 0,82                                           | 0,43                                         | 2                         | 635                                  | 1009                                 | R449A                       |
| CV-9-15 | 1525                    | 0,97                                           | 0,49                                         | 2                         | 817                                  | 1079                                 | R449A                       |
| CV-9-20 | 2025                    | 1,31                                           | 0,67                                         | 3                         | 817                                  | 1103                                 | R449A                       |
| CV-9-25 | 2525                    | 1,65                                           | 0,84                                         | 4                         | 1096                                 | 1365                                 | R449A                       |
| CV-9-30 | 2995                    | 1,96                                           | 1,19                                         | 4                         | 1315                                 | 1416                                 | R449A                       |

características técnicas y constructivas sujetas a variación sin previa aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estantes de cristal intermedios, no refrigerados
- Iluminación LED 6500 K estándar: encimera superior, estante inferior y base frontal
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- **Evaporador estático, opcional ventilado**, con tratamiento EPOXY anticorrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 (30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, exceptd wood decor
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe. Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged frost glass
- Glass shelves non refrigerated
- Standard LED 6500 K lighting: top worktop, shelf and front base
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270 (except for ambient models)
- **Static evaporator, ventilated on demand**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 3 (25°C 60%Hr) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>frontal<br>front<br>decor | decoración<br>total<br>total<br>decor | lacado<br>alto brillo<br>Hight glossy<br>lacquered | evaporador<br>ventilado<br>ventilated<br>evaporator | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|-----------------------------------------|---------------------------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-13               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-15               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-20               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-25               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-30               |                                         |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 SELECTA con o sin reserva  
*Serve over counter modular line 9 SELECTA with or without cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
Consult




DE SERIE  
STANDAR



CV-9-20-CC  
decoración estándar  
standard decor




CV-9-20-C  
frontal inox  
stainless steel front decor



lacado  
lacquered




madera  
wood




opcional


interior 440x270

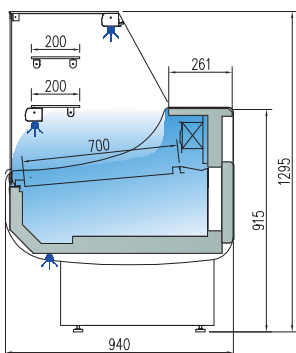

CVEP-9-10-RR  
CVEP-9-13-RR  
CVEP-9-15-RR  
CVEP-9-20-RR  
CVEP-9-25-RR  
CVEP-9-30-RR

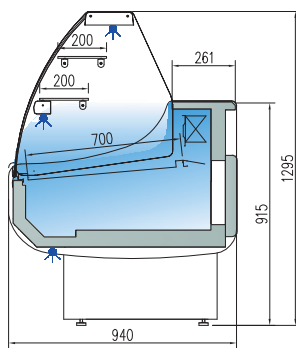

CVEP-9-10-C  
CVEP-9-13-C  
CVEP-9-15-C  
CVEP-9-20-C  
CVEP-9-25-C  
CVEP-9-30-C



CVEP-9-10-CC  
CVEP-9-13-CC  
CVEP-9-15-CC  
CVEP-9-20-CC  
CVEP-9-25-CC  
CVEP-9-30-CC

| mod.      | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | cámara<br>storage<br>(m <sup>3</sup> ) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|-----------|-------------------------|------------------------------------------------|----------------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVEP-9-10 | 1055                    | 0,65                                           | 0,33                                   | 1                         | 522                                  | 404                           | R449A                       |
| CVEP-9-13 | 1305                    | 0,82                                           | 0,43                                   | 2                         | 635                                  | 1009                          | R449A                       |
| CVEP-9-15 | 1525                    | 0,97                                           | 0,49                                   | 2                         | 817                                  | 1079                          | R449A                       |
| CVEP-9-20 | 2025                    | 1,31                                           | 0,67                                   | 3                         | 817                                  | 1103                          | R449A                       |
| CVEP-9-25 | 2525                    | 1,65                                           | 0,84                                   | 4                         | 1096                                 | 1365                          | R449A                       |
| CVEP-9-30 | 2995                    | 1,96                                           | 1,19                                   | 4                         | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Diseño especial para pastelería, con dos estantes en el plano de exposición y dos puntos de iluminación LED 6500 K estándar
  - Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estantes de cristal intermedios, no refrigerados
  - Iluminación LED 6500 K estándar: encimera superior, estante inferior y base frontal
  - Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
  - **Evaporador estático, opcional ventilado**, con tratamiento EPOXY anticorrosión de serie
  - Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Clase climática 4 ( 30°C 55%) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Design focused for bakery, with two shelves at the exposure and two standard lighting
  - Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area
  - 40 mm sides in injected ABS, except wood decor
  - **Standard decoration:** short dark gray sides gray front+ blue decorative stripe. Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged front glass
  - Glass shelves non refrigerated
  - Standard LED 6500 K lighting: top worktop, shelf and front base
  - Optional 3000 K LED (soft light) or Fresh red, same price
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Refrigerated under storage with doors 440x270 (except for ambient models)
  - **Static evaporator, ventilated on demand**, with anticorrosion EPOXY treated as standard
  - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
  - Electronic temperature controller
  - External thermometer
  - Auto defrost, by heated cable as optional
  - Climate class 4 ( 30°C 55%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>fontal<br>front<br>decor | decoración<br>total<br>total<br>decor | lacado<br>alto brillo<br>Hight glossy<br>lacquered | evaporador<br>ventilado<br>ventilated<br>evaporator | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|----------------------------------------|---------------------------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-13               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-15               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-20               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-25               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |
| CV-30               |                                        |                                       |                                                    |                                                     |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 PASTELERÍA con reserva  
*Serve over counter modular line 9 PASTRY with cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
 Consult



DE SERIE  
 STANDAR



CVEP-9-20-C  
 lacado  
 lacquered



CVEP-9-20-CC  
 madera  
 wood



decoración frontal  
 front decor



versión RR




opcional

interior 440x270



CVEP-9-AP90-C  
CVEP-9-AP90-RR



CVEP-9-AN90-C  
CVEP-9-AN90-RR




CVEP-9-RP90-C  
CVEP-9-RP90-RR




CVEP-9-RN90-C  
CVEP-9-RN90-RR

| mod.         | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | exposición<br>display<br>RSA (m <sup>2</sup> ) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|--------------|-------------------------|------------------------|------------------------|------------------------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVEP-9-AN90  | 1500                    | 1300                   | 1500                   | 0,98                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9-AP90  | 1325                    | 1300                   | 1325                   | 1,04                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9N-AN45 | 1090                    | 1300                   | 1060                   | 0,48                                           | -                                    | -                             | -                           |
| CVEP-9N-AP45 | 1040                    | 1300                   | 940                    | 0,53                                           | -                                    | -                             | -                           |
| CVEP-9-RN90  | 1352                    | 1300                   | 1352                   | 1,01                                           | 687                                  | 1125                          | R449A                       |
| CVEP-9-RP90  | 1335                    | 1300                   | 1335                   | 1,32                                           | 687                                  | 1125                          | R449A                       |
| CMCVE-9-8    | 800                     | 910                    | 940                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-12   | 1200                    | 910                    | 940                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-AP90 | 1670                    | 910                    | 690                    | -                                              | -                                    | -                             | -                           |
| CMCVE-9-AN90 | 1638                    | 910                    | 825                    | -                                              | -                                    | -                             | -                           |

## OPCIONES OPTIONS




decoración frontal  
front decor



decoración total  
total decor



frente alto brillo  
glossy frontal



total alto brillo  
total glossy

puerta  
plexi

plexi  
door

cierre  
cortina

night  
blind

luz extra  
LED

extra lighting


neutra

neutral

pre-instalación

remote unit

|              |
|--------------|
| CVEP-9-AN90  |
| CVEP-9-AP90  |
| CVEP-9-RN90  |
| CVEP-9-RP90  |
| CVEP-9N-AN45 |
| CVEP-9N-AP45 |
| CMCVE-9-8    |
| CMCVE-9-12   |
| CMCVE-9-AP90 |
| CMCVE-9-AN90 |

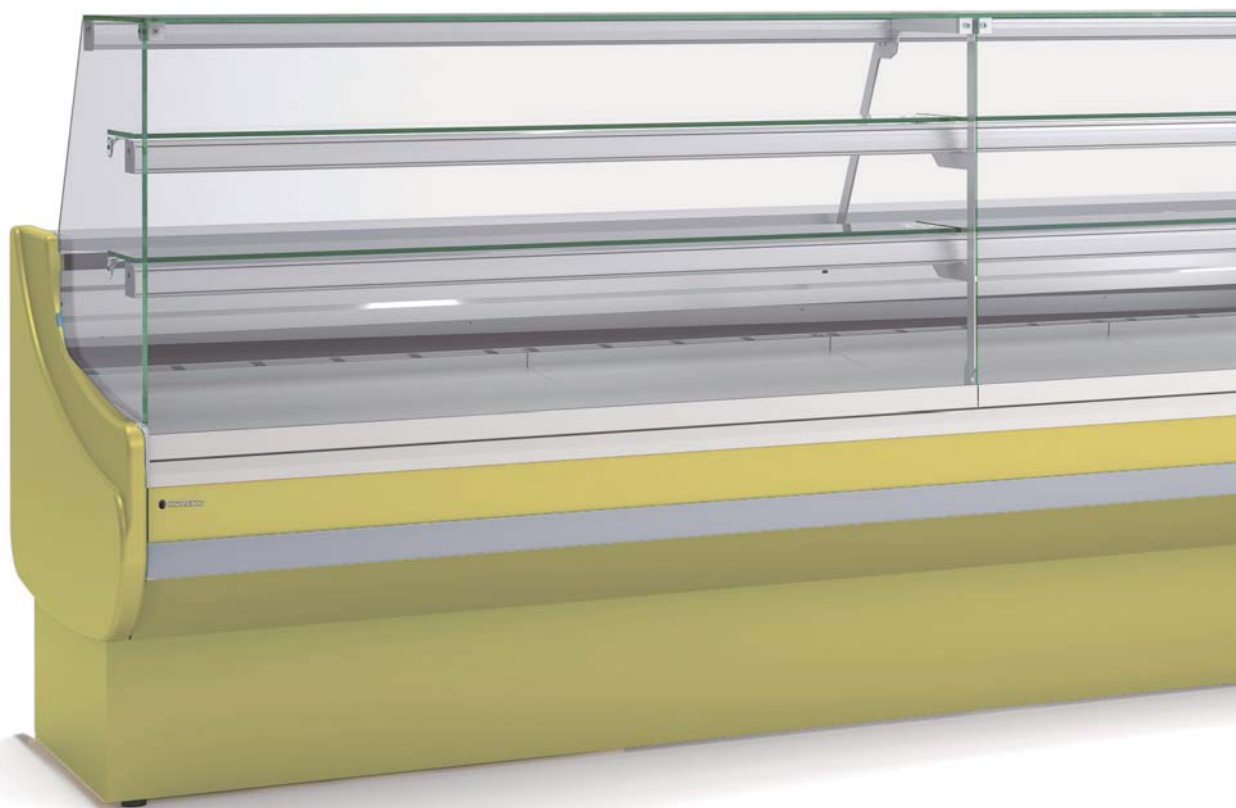

# Vitrina expositora modular serie-9 PASTELERA, con reserva Serve over counters modular line-9 PASTRY, with and without cold storage

7



CUEP-9N-AP45-C  
CUEP-9N-AP45-RR



CUEP-9N-AN45-C  
CUEP-9N-AN45-RR




CMCVE-9-8  
CMCVE-9-12



CMCVE-9-AP90  
CMCVE-9-AN90


## Cristales disponibles

## Available glasses



R290  
optional

Consultar  
Consult

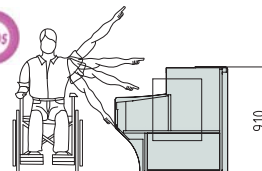

Altura adaptada  
adapted height

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal templado
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP

## AP90 / AN90 / RP90 / RN90

- Angulos refrigerados **sin reserva frigorífica**
- Compatibles con módulos CUEP-9
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Evaporación automática de serie
- Clase climática 4 ( 30°C 55%) régimen M1 (-1/+5°C)

## AP45 / AN45

- Angulos neutros
- Compatibles con módulos CUEP

## CMCVE

- Mueble caja con cajón, estante y enchufe (excepto en ángulos)
- Todas las decoraciones al mismo precio

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- Anodised aluminium profiles
- Front rubber bumper
- Tempered glass
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP

## AP90 / AN90 / RP90 / RN90


- Refrigerated angles, without cooling storage area
- Compatibles with CUEP-9 modules
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Standard automatic evaporation
- Climate class 4 ( 30°C 55%) regime M1 (-1/+5°C)




## AP45 / AN45

- Neutral angles
- Compatibles with CUEP modules

## CMCVE

- Cash counters with shelf, drawer and plug (except angles)
- All decorations included in price

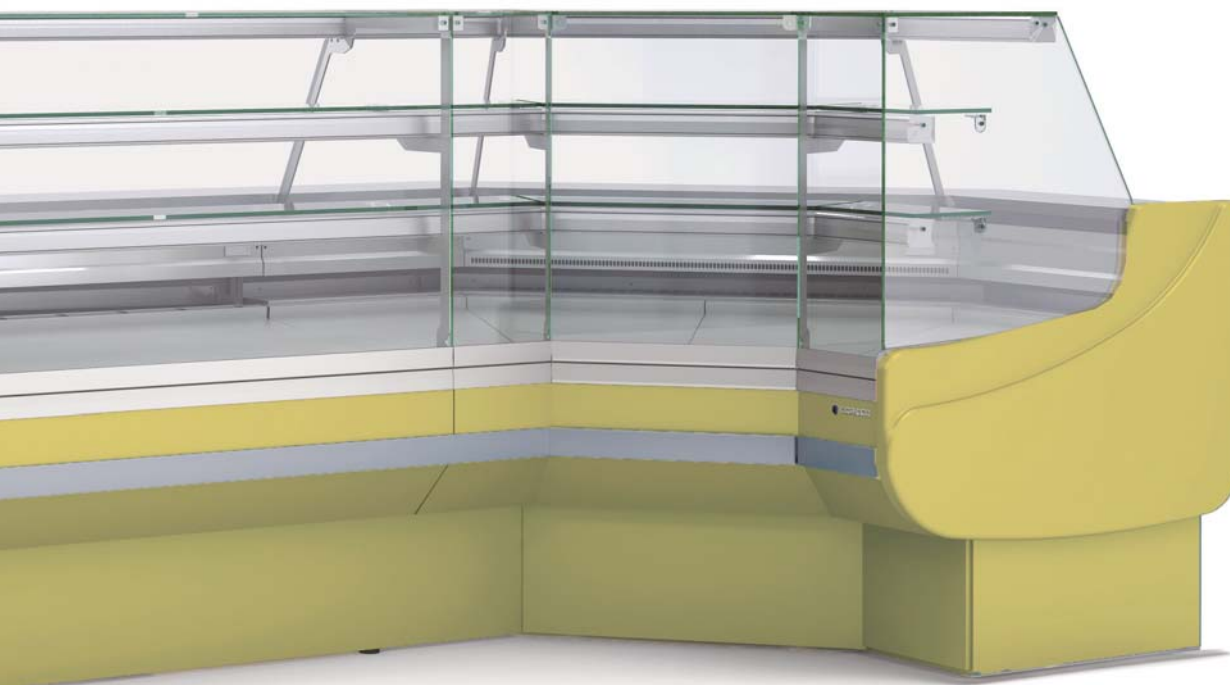

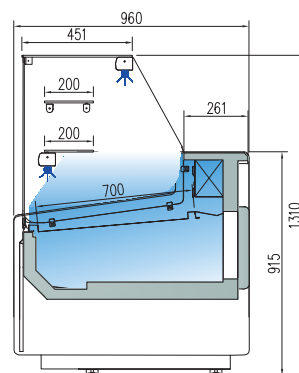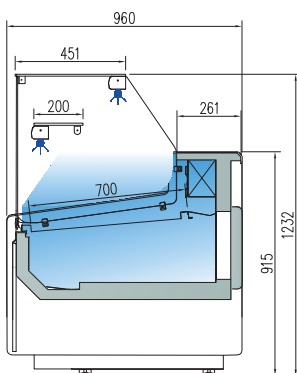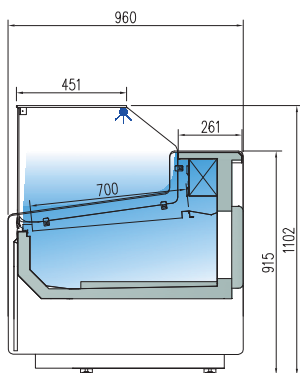

## CON RESERVA - WITH COLD STORAGE

|              |
|--------------|
| CVE-9-10-RCB |
| CVE-9-13-RCB |
| CVE-9-15-RCB |
| CVE-9-20-RCB |
| CVE-9-25-RCB |
| CVE-9-30-RCB |

|             |
|-------------|
| CVE-9-10-RC |
| CVE-9-13-RC |
| CVE-9-15-RC |
| CVE-9-20-RC |
| CVE-9-25-RC |
| CVE-9-30-RC |

|              |
|--------------|
| CVEP-9-10-RC |
| CVEP-9-13-RC |
| CVEP-9-15-RC |
| CVEP-9-20-RC |
| CVEP-9-25-RC |
| CVEP-9-30-RC |

## SIN RESERVA - WITHOUT COLD STORAGE

|               |
|---------------|
| CVES-9-10-RCB |
| CVES-9-13-RCB |
| CVES-9-15-RCB |
| CVES-9-20-RCB |
| CVES-9-25-RCB |
| CVES-9-30-RCB |

|              |
|--------------|
| CVES-9-10-RC |
| CVES-9-13-RC |
| CVES-9-15-RC |
| CVES-9-20-RC |
| CVES-9-25-RC |
| CVES-9-30-RC |

|               |
|---------------|
| CVEPS-9-10-RC |
| CVEPS-9-13-RC |
| CVEPS-9-15-RC |
| CVEPS-9-20-RC |
| CVEPS-9-25-RC |
| CVEPS-9-30-RC |

| mod.          | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m²) | reserva<br>cold storge<br>CVE (m³) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|---------------|-------------------------|-----------------------------------|------------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE/CVES-9-10 | 1055                    | 0,65                              | 0,33                               | 1/0                       | 522                                  | 404                           | R449A                       |
| CVE/CVES-9-13 | 1305                    | 0,82                              | 0,43                               | 2/0                       | 635                                  | 1009                          | R449A                       |
| CVE/CVES-9-15 | 1525                    | 0,97                              | 0,49                               | 2/0                       | 817                                  | 1079                          | R449A                       |
| CVE/CVES-9-20 | 2025                    | 1,31                              | 0,67                               | 3/0                       | 817                                  | 1103                          | R449A                       |
| CVE/CVES-9-25 | 2525                    | 1,65                              | 0,84                               | 4/0                       | 1096                                 | 1365                          | R449A                       |
| CVE/CVES-9-30 | 2995                    | 1,96                              | 1,19                               | 4/0                       | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado
- **Decoración estándar:** costados gris claro frontal inferior gris claro + franja superior inox. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado y abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior y estante
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- **Evaporador estático**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- Sides in ABS injected, 40 mm thick
- **Standard decoration:** bottom frontal and sides in light grey, top frontal in stainless steel
- Anodised aluminium profiles
- Front rubber bumper
- Toughened and hinged frontal glass
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- **Static evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>frontal<br>front<br>decor | decoración<br>total<br>total<br>decor | lacado<br>alto brillo<br>Hight glossy<br>lacquered | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|-----------------------------------------|---------------------------------------|----------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |
| CV-13               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |
| CV-15               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |
| CV-20               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |
| CV-25               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |
| CV-30               |                                         |                                       |                                                    |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y válvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 DELICATESSEN con y sin reserva  
*Serve over counter line 9 DELICATESSEN with and without cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
Consult






DE SERIE  
STANDAR



CVEP-9-20-RC



CVE-9-20-RC

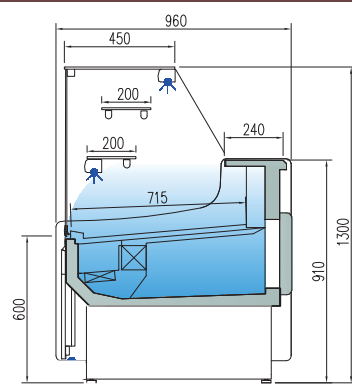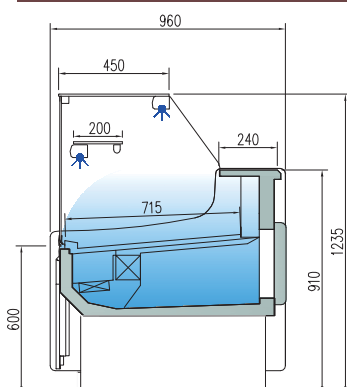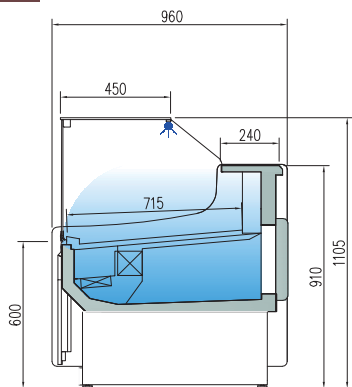

## CON RESERVA - WITH COLD STORAGE

|                 |
|-----------------|
| CVE-9-10-RCB-TF |
| CVE-9-13-RCB-TF |
| CVE-9-15-RCB-TF |
| CVE-9-20-RCB-TF |
| CVE-9-25-RCB-TF |
| CVE-9-30-RCB-TF |

|                |
|----------------|
| CVE-9-10-RC-TF |
| CVE-9-13-RC-TF |
| CVE-9-15-RC-TF |
| CVE-9-20-RC-TF |
| CVE-9-25-RC-TF |
| CVE-9-30-RC-TF |

|                 |
|-----------------|
| CVEP-9-10-RC-TF |
| CVEP-9-13-RC-TF |
| CVEP-9-15-RC-TF |
| CVEP-9-20-RC-TF |
| CVEP-9-25-RC-TF |
| CVEP-9-30-RC-TF |

## SIN RESERVA - WITHOUT COLD STORAGE

|                  |
|------------------|
| CVES-9-10-RCB-TF |
| CVES-9-13-RCB-TF |
| CVES-9-15-RCB-TF |
| CVES-9-20-RCB-TF |
| CVES-9-25-RCB-TF |
| CVES-9-30-RCB-TF |

|                 |
|-----------------|
| CVES-9-10-RC-TF |
| CVES-9-13-RC-TF |
| CVES-9-15-RC-TF |
| CVES-9-20-RC-TF |
| CVES-9-25-RC-TF |
| CVES-9-30-RC-TF |

|                  |
|------------------|
| CVEPS-9-10-RC-TF |
| CVEPS-9-13-RC-TF |
| CVEPS-9-15-RC-TF |
| CVEPS-9-20-RC-TF |
| CVEPS-9-25-RC-TF |
| CVEPS-9-30-RC-TF |

| mod.               | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m²) | cámara<br>storage<br>CVE (m³)) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|--------------------|-------------------------|-----------------------------------|--------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE / CVES-9-10-TF | 1055                    | 0,65                              | 0,33                           | 1/0                       | 522                                  | 419                           | R449A                       |
| CVE / CVES-9-13-TF | 1305                    | 0,82                              | 0,43                           | 2/0                       | 635                                  | 1071                          | R449A                       |
| CVE / CVES-9-15-TF | 1525                    | 0,97                              | 0,49                           | 2/0                       | 817                                  | 1107                          | R449A                       |
| CVE / CVES-9-20-TF | 2025                    | 1,31                              | 0,67                           | 3/0                       | 1096                                 | 1377                          | R449A                       |
| CVE / CVES-9-25-TF | 2525                    | 1,65                              | 0,84                           | 4/0                       | 1315                                 | 1433                          | R449A                       |
| CVE / CVES-9-30-TF | 2995                    | 1,96                              | 1,19                           | 4/0                       | 1315                                 | 1472                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado
- **Decoración estándar:** costados gris claro frontal inferior gris claro + franja superior inox. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado y abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior y estante
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- Sides in ABS injected, 40 mm thick
- **Standard decoration:** bottom frontal and sides in light grey, top frontal in stainless steel
- Anodised aluminium profiles
- Front rubber bumper
- Toughened and hinged frontal glass
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>frontal<br>front<br>decor | decoración<br>total<br>total<br>decor | lacado<br>alto brillo<br>High glossy<br>lacquered | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|-----------------------------------------|---------------------------------------|---------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |
| CV-13               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |
| CV-15               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |
| CV-20               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |
| CV-25               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |
| CV-30               |                                         |                                       |                                                   |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 DELICATESSEN con y sin reserva  
*Serve over counter line 9 DELICATESSEN with and without cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
Consult




DE SERIE  
STANDAR





CVE-9-AP90-RC  
CVE-9-AP90-RCB  
CVEP-9-AP90-RC



CVE-9-AN90-RC  
CVE-9-AN90-RCB  
CVEP-9-AN90-RC



CVE-9-RP90-RC  
CVE-9-RP90-RCB  
CVEP-9-RP90-RC



CVE-9-RN90-RC  
CVE-9-RN90-RCB  
CVEP-9-RN90-RC

| mod.                    | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | exposición<br>display<br>RSA (m²) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|-------------------------|-------------------------|------------------------|------------------------|-----------------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE/CVEP-9-AN90-RCB/RC  | 1500                    | 1100/1230/1310         | 1500                   | 0,98                              | 687                                  | 1125                          | R449A                       |
| CVE/CVEP-9-AP90-RCB/RC  | 1325                    | 1100/1230/1310         | 1325                   | 1,04                              | 687                                  | 1125                          | R449A                       |
| CVE/CVEP-9N-AN45-RCB/RC | 1090                    | 1100/1230/1310         | 1060                   | 0,48                              | -                                    | -                             | -                           |
| CVE/CVEP-9N-AP45-RCB/RC | 1040                    | 1100/1230/1310         | 940                    | 0,53                              | -                                    | -                             | -                           |
| CVE/CVEP-9-RN90-RCB/RC  | 1352                    | 1100/1230/1310         | 1352                   | 1,01                              | 687                                  | 1125                          | R449A                       |
| CVE/CVEP-9-RP90-RCB/RC  | 1335                    | 1100/1230/1310         | 1335                   | 1,32                              | 687                                  | 1125                          | R449A                       |
| CMCVE-9-8-RC            | 800                     | 910                    | 940                    | -                                 | -                                    | -                             | -                           |
| CMCVE-9-12-RC           | 1200                    | 910                    | 940                    | -                                 | -                                    | -                             | -                           |
| CMCVE-9-AP90-RC         | 1670                    | 910                    | 690                    | -                                 | -                                    | -                             | -                           |
| CMCVE-9-AN90-RC         | 1638                    | 910                    | 825                    | -                                 | -                                    | -                             | -                           |

## OPCIONES OPTIONS



puerta  
plexi  
plexi  
door


cierre  
cortina  
night  
blind

luz extra  
LED  
extra  
lighting

neutra  
neutral

pre-instalacion  
remote unit

|                         |
|-------------------------|
| CVE/CVEP-9-AN90-RCB/RC  |
| CVE/CVEP-9-AP90-RCB/RC  |
| CVE/CVEP-9-RN90-RCB/RC  |
| CVE/CVEP-9-RP90-RCB/RC  |
| CVE/CVEP-9N-AN45-RCB/RC |
| CVE/CVEP-9N-AP45-RCB/RC |
| CMCVE-9-8-RC            |
| CMCVE-9-12-RC           |
| CMCVE-9-AP90-RC         |
| CMCVE-9-AN90-RC         |

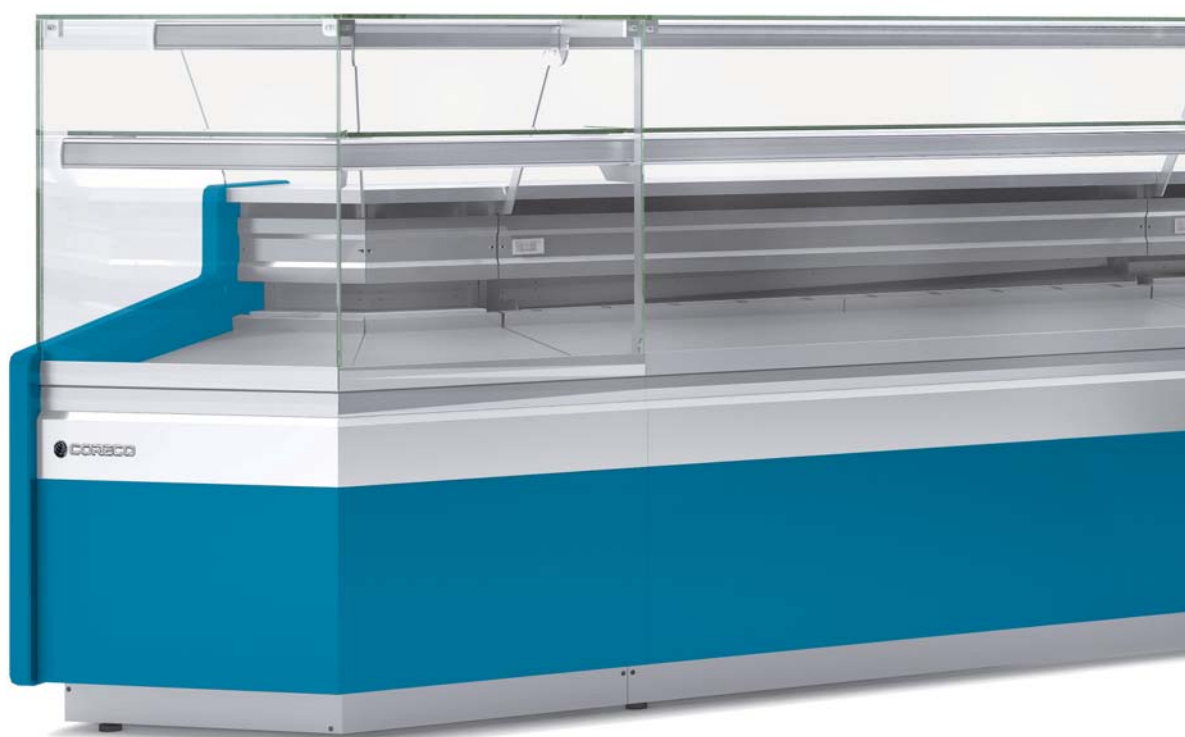

## Vitrina expositora modular serie-9 DELICATESSEN, con reserva Serve over counters modular line-9 DELICATESSEN, with cold storage

7



CVE-9N-RP45-RCB  
CVE-9N-RP45-RC  
CVEP-9N-RP45-RC


CVE-9N-RN45-RCB  
CVE-9N-RN45-RC  
CVEP-9N-RN45-RC

CMCVE-9-8-RC  
CMCVE-9-12-RC

CMCVE-9-RP90-RC  
CMCVE-9-RN90-RC


Cristales disponibles

Available glasses



R290 optional

Consultar  
Consult

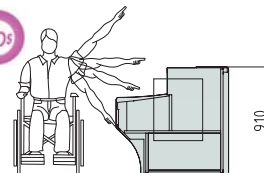

Altura adaptada  
adapted height

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal templado
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP

### AP90 / AN90 / RP90 / RN90

- Angulos refrigerados **sin reserva frigorífica**
- Compatibles con módulos CVE-RC CVE-RCB CVEP-RC
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Evaporación automática de serie
- Clase climática 4 ( 30°C 55%) régimen M1 (-1/+5°C)

### AP45 / AN45

- Angulos neutros
- Compatibles con módulos VE-RC CVE-RCB CVEP-RC

### CMCVE

- Mueble caja con cajón, estante y enchufe (excepto en ángulos)
- Todas las decoraciones al mismo precio

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- Anodised aluminium profiles
- Front rubber bumper
- Tempered glass
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP

### AP90 / AN90 / RP90 / RN90

- Refrigerated angles, without cooling storage area
- Compatibles with CVE-RC CVE-RCB CVEP-RC modules
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Standard automatic evaporation
- Climate class 4 ( 30°C 55%) regime M1 (-1/+5°C)


### AP45 / AN45

- Neutral angles
- Compatibles with VE-RC CVE-RCB CVEP-RC modules


### CMCVE

- Cash counters with shelf, drawer and plug (except angles)
- All decorations included in price




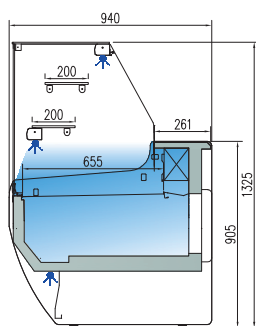

CVP-9-10-RR  
CVP-9-13-RR  
CVP-9-15-RR  
CVP-9-20-RR  
CVP-9-25-RR  
CVP-9-30-RR

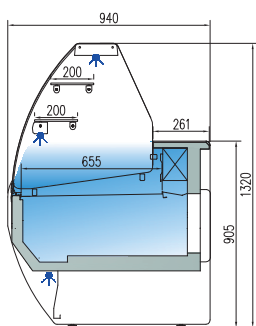

CVP-9-10-C  
CVP-9-13-C  
CVP-9-15-C  
CVP-9-20-C  
CVP-9-25-C  
CVP-9-30-C

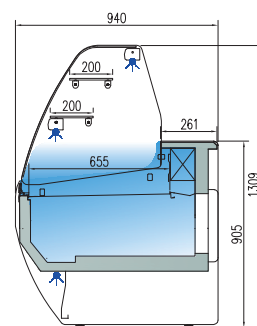

CVP-9-10-CC  
CVP-9-13-CC  
CVP-9-15-CC  
CVP-9-20-CC  
CVP-9-25-CC  
CVP-9-30-CC

| mod.     | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m²) | reserva<br>cold storage<br>(m³) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | potencia frig.<br>frig. power<br>(W) | refrigerante<br>refrigerant |
|----------|-------------------------|-----------------------------------|---------------------------------|---------------------------|--------------------------------------|--------------------------------------|-----------------------------|
| CVP-9-10 | 1055                    | 0,65                              | 0,33                            | 1                         | 522                                  | 404                                  | R449A                       |
| CVP-9-13 | 1305                    | 0,82                              | 0,43                            | 2                         | 635                                  | 1009                                 | R449A                       |
| CVP-9-15 | 1525                    | 0,97                              | 0,49                            | 2                         | 817                                  | 1079                                 | R449A                       |
| CVP-9-20 | 2025                    | 1,31                              | 0,67                            | 3                         | 817                                  | 1103                                 | R449A                       |
| CVP-9-25 | 2525                    | 1,65                              | 0,84                            | 4                         | 1096                                 | 1365                                 | R449A                       |
| CVP-9-30 | 2995                    | 1,96                              | 1,19                            | 4                         | 1315                                 | 1416                                 | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

- Diseño especial para pastelería, con dos estantes en el plano de exposición y dos puntos de iluminación LED 6500 K estándar
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado
- **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior, estante y base frontal
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- **Evaporador estático, opcional ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Design focused for bakery, with two shelves at the exposure and two standard lighting
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- Sides in ABS injected, 40 mm thick
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop, shelf and frontal base
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- **Static evaporator, ventilated as optional**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

SERVE OVER COUNTER • VITRINAS MODULARES

| OPCIONES<br>OPTIONS | decoración<br>frontal<br>decor | decoración<br>total<br>decor | lacado<br>alto brillo<br>High glossy<br>lacquered | evaporador<br>ventilado<br>ventilated<br>evaporator | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|--------------------------------|------------------------------|---------------------------------------------------|-----------------------------------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |
| CV-13               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |
| CV-15               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |
| CV-20               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |
| CV-25               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |
| CV-30               |                                |                              |                                                   |                                                     |                             |                               |                               |                                    |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 SELECTA PASTELERÍA con reserva  
*Serve over counter modular line 9 PASTRY SELECTA with cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
 Consult



DE SERIE  
 STANDAR



CVP-9-20-C  
 lacado  
 lacquered



CVP-9-20-CC  
 madera  
 wood



frente un color  
 one color front decor




frontal decorado  
 front decor




opcional

interior 440x270



CVEA-9-10-TF  
CVEA-9-13-TF  
CVEA-9-15-TF  
CVEA-9-20-TF  
CVEA-9-25-TF  
CVEA-9-30-TF



CVEE-9-10-TF  
CVEE-9-13-TF  
CVEE-9-15-TF  
CVEE-9-20-TF  
CVEE-9-25-TF  
CVEE-9-30-TF

| mod.      | largo<br>length<br>(mm) | exposición<br>display<br>RSA (m²) | reserva<br>cold storage<br>(m³) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|-----------|-------------------------|-----------------------------------|---------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVEA-9-10 | 1055                    | 0,65                              | 0,33                            | 1                         | 522                                  | 419                           | R449A                       |
| CVEA-9-13 | 1305                    | 0,82                              | 0,43                            | 2                         | 635                                  | 1071                          | R449A                       |
| CVEA-9-15 | 1525                    | 0,97                              | 0,49                            | 2                         | 817                                  | 1107                          | R449A                       |
| CVEA-9-20 | 2025                    | 1,31                              | 0,67                            | 3                         | 1096                                 | 1377                          | R449A                       |
| CVEA-9-25 | 2525                    | 1,65                              | 0,84                            | 4                         | 1315                                 | 1433                          | R449A                       |
| CVEA-9-30 | 2995                    | 1,96                              | 1,19                            | 4                         | 1315                                 | 1472                          | R449A                       |
| CVEE-9-10 | 1055                    | 0,65                              | 0,33                            | 1                         | 522                                  | 419                           | R449A                       |
| CVEE-9-13 | 1305                    | 0,82                              | 0,43                            | 2                         | 635                                  | 1071                          | R449A                       |
| CVEE-9-15 | 1525                    | 0,97                              | 0,49                            | 2                         | 817                                  | 1107                          | R449A                       |
| CVEE-9-20 | 2025                    | 1,31                              | 0,67                            | 3                         | 1096                                 | 1377                          | R449A                       |
| CVEE-9-25 | 2525                    | 1,65                              | 0,84                            | 4                         | 1315                                 | 1433                          | R449A                       |
| CVEE-9-30 | 2995                    | 1,96                              | 1,19                            | 4                         | 1315                                 | 1472                          | R449A                       |

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 40 mm en ABS inyectado excepto acabado madera
- **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal auto-servicio
- **CVEE:** Iluminación LED 6500 K estándar: encimera superior y estante. Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **Evaporador ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 3 ( 25°C 60%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, except wood decor
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Self-service frontal glass
- **CVEE:** Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **Ventilated evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 3 ( 25°C 60%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>fontal<br>decor | decoración<br>total<br>decor | lacado<br>alto brillo<br>High glossy<br>lacquered | cierre plexi<br>CVEE<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>CVEE<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|-------------------------------|------------------------------|---------------------------------------------------|-------------------------------------|-------------------------------|-------------------------------|-------------------------------------|-------------------|-----------|
| CV-10               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |
| CV-13               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |
| CV-15               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |
| CV-20               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |
| CV-25               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |
| CV-30               |                               |                              |                                                   |                                     |                               |                               |                                     |                   |           |

Versión REMOTO, incluye válvula de expansión (R449A) y valvula solenoide  
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora modular serie 9 AUTOSERVICIO, con reserva  
*Serve over counter modular line 9 SELF SERVICE, with cold storage*

7

all photos must be considered as a reference - fotografías no contractuales



Consultar  
Consult



DE SERIE  
STANDAR



CVEA-9-20  
personalizada  
customized




CVEE-9-20  
lacado  
lacquered




opcional


interior 440x270

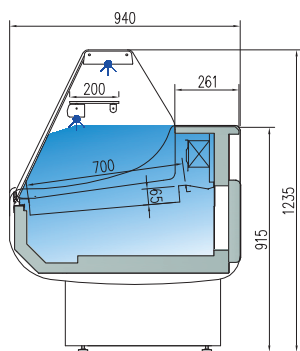

CVE-9-10-R-P  
CVE-9-13-R-P  
CVE-9-15-R-P  
CVE-9-20-R-P  
CVE-9-25-R-P  
CVE-9-30-R-P

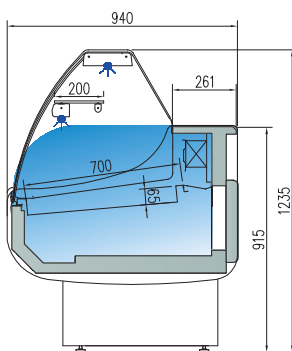

CVE-9-10-C-P  
CVE-9-13-C-P  
CVE-9-15-C-P  
CVE-9-20-C-P  
CVE-9-25-C-P  
CVE-9-30-C-P

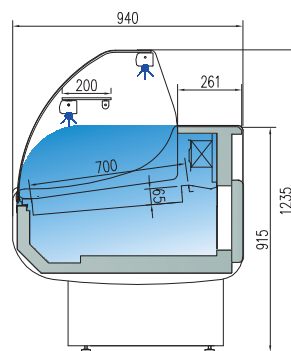

CVE-9-10-CC-P  
CVE-9-13-CC-P  
CVE-9-15-CC-P  
CVE-9-20-CC-P  
CVE-9-25-CC-P  
CVE-9-30-CC-P

| mod.       | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>RSA (m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(W) | refrigerante<br>refrigerant |
|------------|-------------------------|---------------------------|-----------------------------------|---------------------------|--------------------------------------|-------------------------------|-----------------------------|
| CVE-9-10-P | 1055                    | 0,29                      | 0,61                              | 1                         | 522                                  | 405                           | R449A                       |
| CVE-9-13-P | 1305                    | 0,8                       | 0,8                               | 2                         | 635                                  | 1009                          | R449A                       |
| CVE-9-15-P | 1525                    | 0,43                      | 0,93                              | 2                         | 817                                  | 1079                          | R449A                       |
| CVE-9-20-P | 2025                    | 0,59                      | 1,24                              | 3                         | 817                                  | 1103                          | R449A                       |
| CVE-9-25-P | 2525                    | 0,74                      | 1,56                              | 4                         | 1096                                 | 1365                          | R449A                       |
| CVE-9-30-P | 2995                    | 1,7                       | 1,97                              | 4                         | 1315                                 | 1416                          | R449A                       |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Encimera de trabajo en acero inox **AISI-316**
- Plano de exposición hermético de altura 65 mm, con desagüe canalizado al exterior, fabricado en acero inox **AISI-316**, placa fría opcional
- Protector frontal evaporador en **AISI-316**
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilaría en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación LED 6500 K estándar: encimera superior y estante
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- **Evaporador estático**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 ( 30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Interior and exterior finish in plastic coated steel
- Worktop in stainless steel **AISI-316**
- Exposure level hermetic 65mm height, with drainage channeled up to the outside, made of stainless steel. **AISI-316**, cold plate as optinal
- 40 mm sides in injected ABS, exceptd wood decor
- **AISI-316** stainless steel evaporator front cover
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Glass shelf non refrigerated
- Standard LED 6500 K lighting: top worktop and shelf
- Optional 3000 K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270 free (except for am-bient models)
- **Static evaporator**, with anticorrosion EPOXY treated as standard
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 ( 30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| OPCIONES<br>OPTIONS | decoración<br>fontal<br>front<br>decor | placa fría<br>cold plate | cierre plexi<br>plexi doors | cierre cortina<br>night blind | estante chasis<br>chasis base | luz extra<br>LED<br>extra lighting | neutra<br>neutral | pre-inst. |
|---------------------|----------------------------------------|--------------------------|-----------------------------|-------------------------------|-------------------------------|------------------------------------|-------------------|-----------|
| CV-10               |                                        |                          |                             |                               |                               |                                    |                   |           |
| CV-13               |                                        |                          |                             |                               |                               |                                    |                   |           |
| CV-15               |                                        |                          |                             |                               |                               |                                    |                   |           |
| CV-20               |                                        |                          |                             |                               |                               |                                    |                   |           |
| CV-25               |                                        |                          |                             |                               |                               |                                    |                   |           |
| CV-30               |                                        |                          |                             |                               |                               |                                    |                   |           |



Consultar  
Consult




## AISI-316

Plano exposición y encimera AISI-316  
AISI-316 exposure and worktop



CVE-9-20-C-P  
frontal inox  
inox decor



opcional

interior 440x270

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: [ccf@nt-rt.ru](mailto:ccf@nt-rt.ru) || сайт: <https://coreco.nt-rt.ru/>