

Холодильные шкафы ACR, ACRV, ACC, ACCV, ACM

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: ccf@nt-rt.ru || сайт: <https://coreco.nt-rt.ru/>



ACR-751
ACC-751



ACR-752
ACC-752

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-750	-2°C +8°C	680	2160	730	3	505	230V-50Hz	R134a*	245	253	E	5 40°C 40%
								R290	845	373	C	5 40°C 40%
ACC-750	-20°C -15°C	680	2160	730	3	505	230V-50Hz	R290	606	952	E	4 30°C 55%
								R452A*	452	620	E	4 30°C 55%

*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- 70 mm aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- 70 mm sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

OPCIONES	OPTIONS
parrilla adicional	extra shelf
juego guías adicional	slides extra set
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

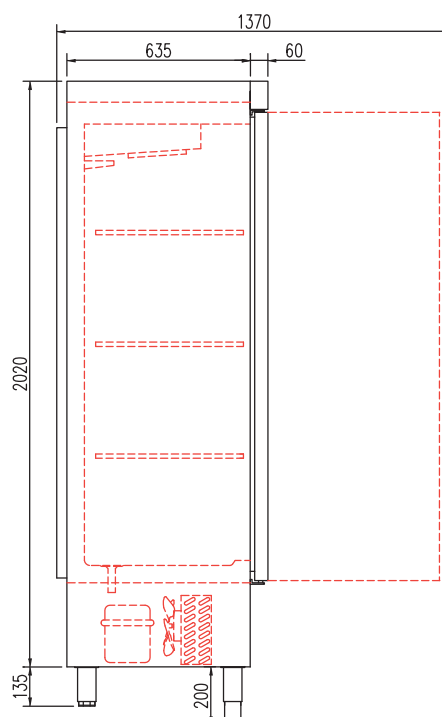



ACR-751





ACR-1302
ACC-1302



ACR-1303
ACC-1303



ACR-1304
ACC-1304

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-1300	-2°C +8°C	1370	2160	730	6+3	1201	230V-50Hz	R134a*	485	442	E	5 40°C 40%
								R290	845	373	D	5 40°C 40%
ACC-1300	-20°C -15°C	1370	2160	730	6+3	1201	230V-50Hz	R290	907	952	E	4 30°C 55%
								R452A*	1042	990	E	4 30°C 55%

*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **70 mm** aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **70 mm** sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

OPCIONES	OPTIONS
parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
juego guías adicional	slides extra set
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

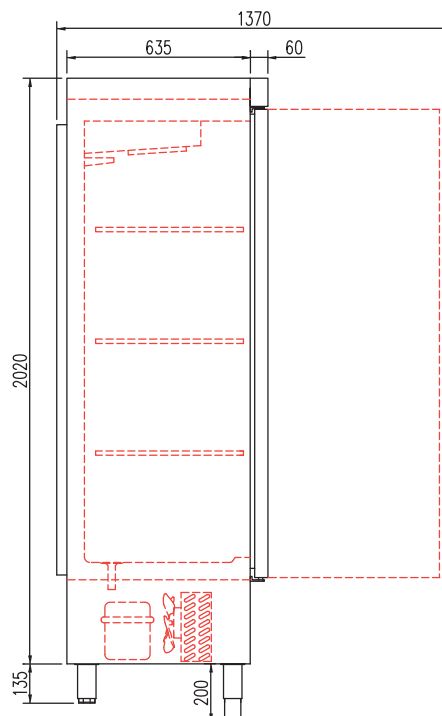



ACR-1304





ACR-2003
ACC-2003



ACR-2004
ACC-2004



ACR-2005
ACC-2005



ACR-2006
ACC-2006

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-2000	-2°C +8°C	2055	2160	730	9+6	1852	230V-50Hz	R290	1702	897	E	5 40°C 40%
								R452A*	1215	894	E	5 40°C 40%
ACC-2000	-20°C -15°C	2055	2160	730	9+6	1852	230V-50Hz	R290	1814	1680	E	4 30°C 55%
								R452A*	1235	1510	E	4 30°C 55%


*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- 70 mm aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- 70 mm sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

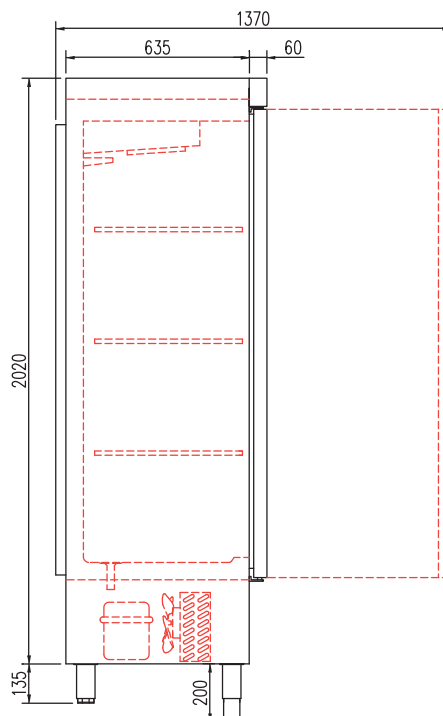

OPCIONES	OPTIONS
parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
juego guías adicional	slides extra set
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
cambio R290 por R452A	R290 to R452A
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



ACC-2006





ACRV-751
ACCV-751



ACRV-1302
ACCV-1302



ACRV-2003
ACCV-2003

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase 2015/1094 EN16825
ACRV-751	-2°C +8°C	680	2160	730	4	505	230V-50Hz	R134a*	245	264	4 30°C 55%
ACCV-751	-20°C -15°C	680	2160	730	4	505	230V-50Hz	R290	502	260	5 40°C 40%
ACRV-1302	-2°C +8°C	1370	2160	730	8+4	1201	230V-50Hz	R290	606	560	4 30°C 55%
ACCV-1302	-20°C -15°C	1370	2160	730	8+4	1201	230V-50Hz	R452A*	452	627	4 30°C 55%
ACRV-2003	-2°C +8°C	2055	2160	730	12+8	1852	230V-50Hz	R134a*	485	461	4 30°C 55%
ACCV-2003	-20°C -15°C	2055	2160	730	12+8	1852	230V-50Hz	R290	845	396	4 30°C 55%
								R290	907	902	4 30°C 55%
								R452A*	1042	1010	4 30°C 55%
								R452A*	1215	932	4 30°C 55%
								R290	1702	943	4 30°C 55%
								R290	1814	1726	4 30°C 55%
								R452A*	1235	1556	4 30°C 55%


*optional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV: Doble cristal + LEDs, ACCV: Triple cristal + LEDs
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- 70 mm aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV: Double glazed door + LEDs, ACCV: Triple glazed door + LEDs
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- 70 mm sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C

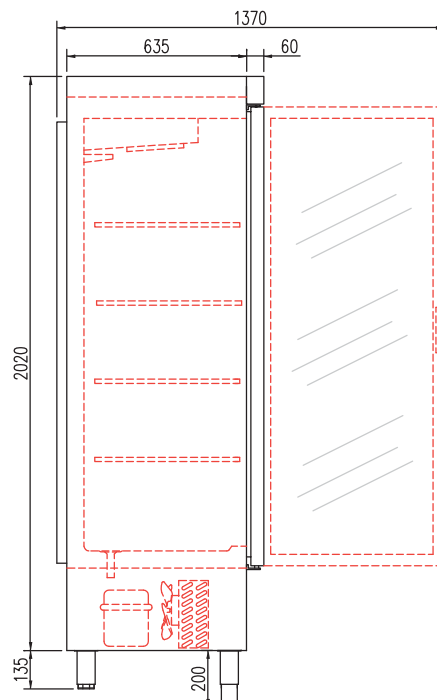

OPCIONES	OPTIONS
parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
juego guías adicional	slides extra set
cerradura puerta cristal	glass door lock
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



ACRV-1302



ACRV-751



ACR-55-1
ACC-55-1



ACR-55-2
ACC-55-2



ACR-125-2
ACC-125-2



ACR-125-3
ACC-125-3



ACR-125-4
ACC-125-4



ACM-125

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares de guías sets of slides	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-55	-2°C +8°C	540	2075	730	3	3	409	230V-50Hz	R134a*	304	295	D	5 40°C 40%
									R290	271	201	D	5 40°C 40%
ACR-125	-2°C +8°C	1250	2075	665	6	6	964	230V-50Hz	R134a*	304	301	D	4 30°C 55%
									R290	543	416	D	4 30°C 55%
ACC-55	-20°C -15°C	540	2075	755	3	3	409	230V-50Hz	R290	385	432	E	4 30°C 55%
									R452A*	353	452	E	4 30°C 55%
ACC-125	-20°C -15°C	1250	2075	690	6	6	964	230V-50Hz	R290	833	810	E	4 30°C 55%
									R452A*	534	520	E	4 30°C 55%
ACM-125	2°C +8°C -20°C -15°C	1250	2075	690	6	6	830	230V-50Hz	R-134a+R-452A*	304+353	295+452	-	4 30°C 55%
									R-290+R290	271+385	213+432	-	4 30°C 55%

*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV / ACCV doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV / ACCV double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

OPCIONES	OPTIONS
parrilla adicional	extra shelf
set adicional guías	slides extra set
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

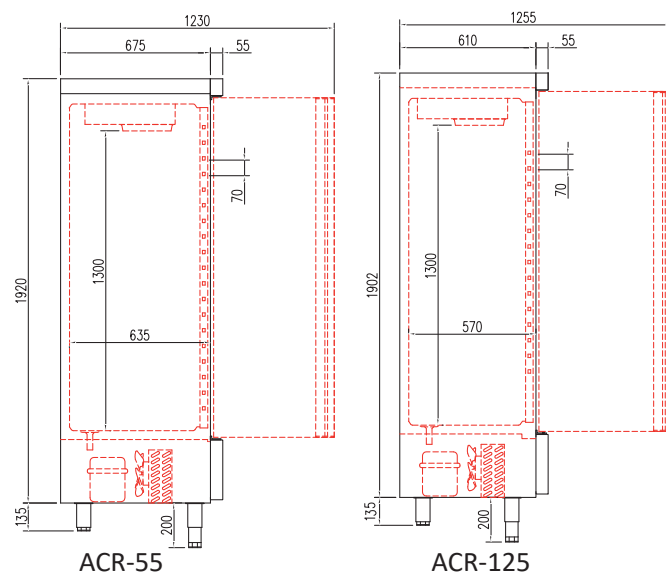

STANDARD	
-2°C +8°C	R290
-20°C -15°C	R290

Armario SNACK 340 L /750 L, refrigeración y congelados
SNACK 340 L /750 L cabinet, chiller and freezer

4



ACRV-55
ACCV-55



ACRV-125
ACCV-125

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares de guías sets of slides	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase 2015/1094 EN16825
ACRV-55	-2°C +8°C	540	2075	730	4	4	409	230V-50Hz	R134a*	304	308	4 30°C 55%
									R290	271	213	4 30°C 55%
ACRV-125	-2°C +8°C	1250	2075	665	8	8	964	230V-50Hz	R452A*	668	638	4 30°C 55%
									R290	543	434	4 30°C 55%
ACCV-55	-20°C -15°C	540	2075	730	4	4	409	230V-50Hz	R290	385	445	4 30°C 55%
									R452A*	353	465	4 30°C 55%
ACCV-125	-20°C -15°C	1250	2075	665	8	8	964	230V-50Hz	R290	833	828	4 30°C 55%
									R452A*	534	538	4 30°C 55%

*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV / ACCV doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV / ACCV double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

OPCIONES	OPTIONS
parrilla adicional	extra shelf
set adicional guías	slides extra set
cerradura puerta cristal	glass door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

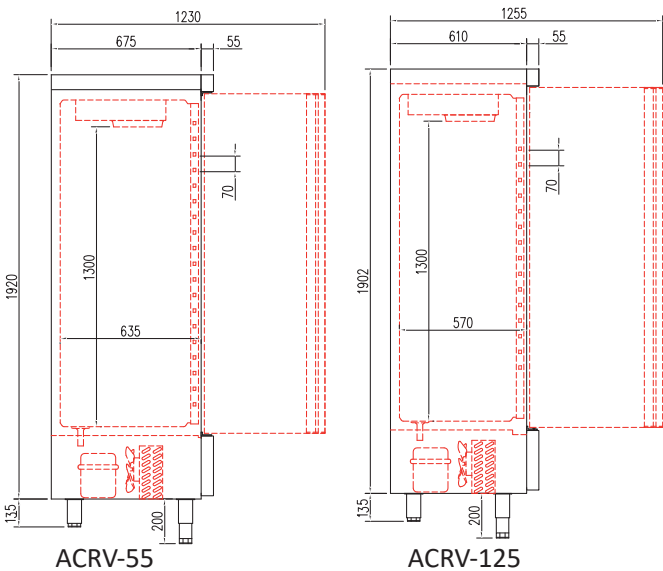

STANDARD		
-2°C +8°C	R290	
-20°C -15°C	R290	

DEPARTAMENTO DE CONGELADOS
FREEZER DEPARTMENT

4

ARMARIOS
REFRIGERADOS
4



ACM-1302



ACM-1303



ACM-1304



ACM-2005

Dos cámaras, de funcionamiento y temperaturas independientes
Two compartments, that operate independently and at different temperatures

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	cajones drawers	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
ACM-1300	-2°C +8°C	-20°C -15°C	1370	2115	730	5+1	0	1165	230V-50Hz	R134a+R452A*	485+398	434+445
										R290+R290	820+398	523+445
ACM-2000	-2°C +8°C	-20°C -15°C	2055	2115	730	9+3	0	1725	230V-50Hz	R134a+R452A*	485+606	434+553
										R290+R290	820+606	523+553

*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 40°C ambiente

Departamento de congelados

- Evaporador sistema tiro forzado, con recubrimiento protector
- Motor independiente
- Temperatura de trabajo -20°C -15°C a 40°C ambiente



OPCIONES


OPTIONS

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 40° C ambient

Low temperature door

- Fan assisted evaporator, with epoxi anticorrosion coating.
- Independent refrigerating units for each department
- Operating temperature -20°C -15°C, 40°C ambient

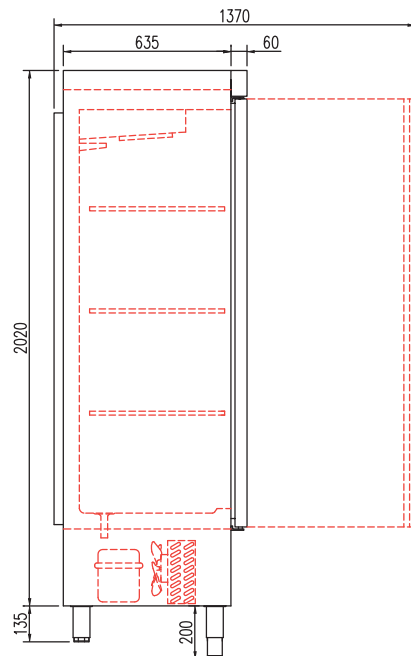

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: ccf@nt-rt.ru || сайт: <https://coreco.nt-rt.ru/>